

# DEUTZ TCD 2.9

Powerful, efficient and compact.



For Agricultural Equipment

The TCD 2.9 – With up to 77 kW power output ideal for your application.



- **POWERFUL** / Up to 77 kW & 420 Nm
- **LOW EMISSIONS** / EU Stage V & Tier 4f Certified
- **MODULAR** / Wide range of applications due to a variety of options
- **VERSATILE** / Industrial & EDG – Version\* (Stage IIIA, Tier 3)



STAGE **V**  
certified **V**®

\* Emission Downgrade without EAT


DEUTZ TCD 2.9

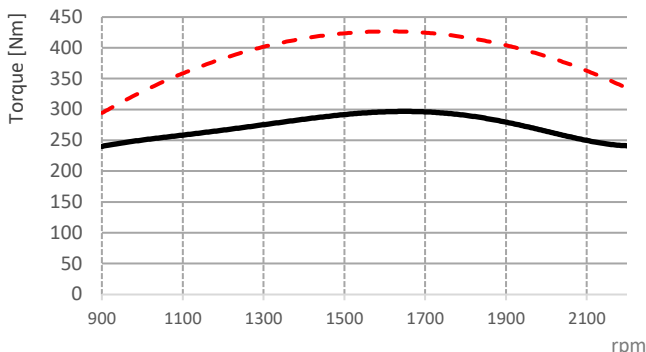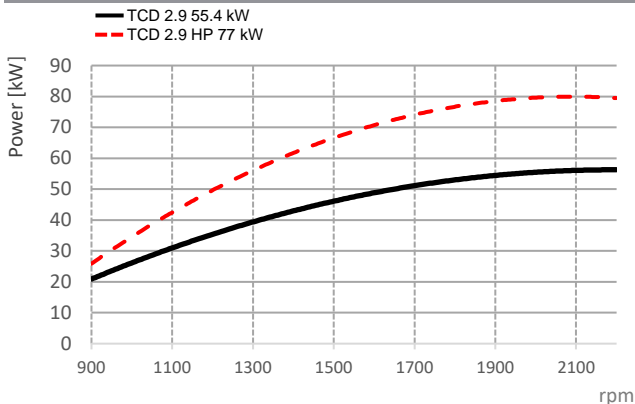

TECHNICAL DATA

ENGINE TYPE		TCD 2.9 55.4 kW	TCD 2.9 HP 77 kW
No. of Cylinders		4	4
Displacement	l	2.9	2.9
Max. Nominal Speed	min <sup>-1</sup>	2600	2600
Aspiration		Turbocharger with charge air cooler	Turbocharger with charge air cooler
Power Output acc. ISO 14396	kW	55.4	77
At Speed	min <sup>-1</sup>	2200	2200
Max. Torque	Nm	375	420
At Speed	min <sup>-1</sup>	1400	1600
Min. Idling Speed	min <sup>-1</sup>	900	900
Weight (DIN 70020 Part 7A)	kg	300	300

DIMENSIONS

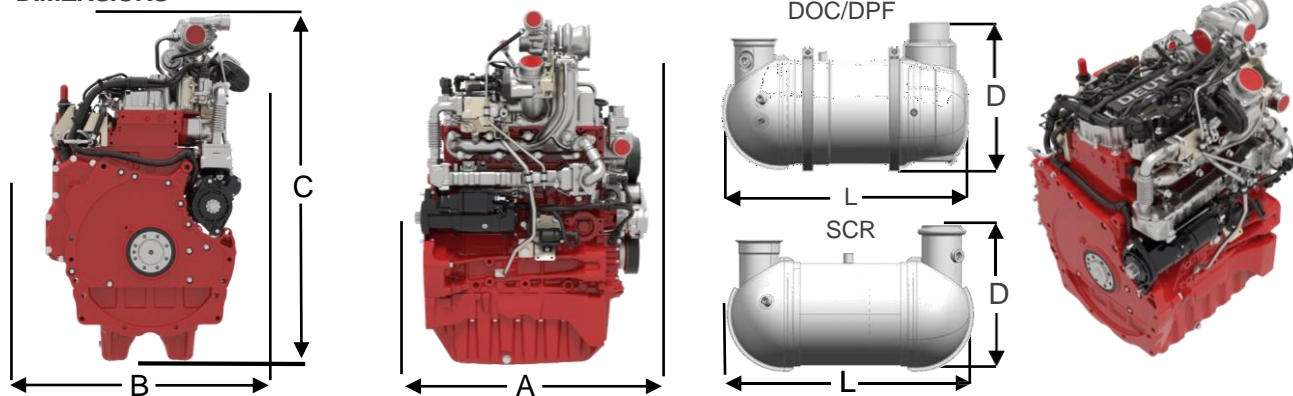

ENGINE TYPE		A	B	C	D	L	D	L	DOC/DPF	SCR
TCD 2.9 55.4 kW	mm	625	648	955	199	470	-	-	● ■	
TCD 2.9 HP 77 kW	mm	641	640	955	199	612	781	267	● ■	● ■

- Standard for US Tier 4
- Standard for EU Stage V



**DEUTZ AG**  
 Ottostraße 1  
 51149 Cologne  
 Germany  
[www.deutz.com](http://www.deutz.com)  
[www.sdeutz.com](http://www.sdeutz.com)