

DEUTZ TCD 2.2

Powerful, efficient and compact.



For Agricultural Equipment

The TCD 2.2 – With up to 55.4 kW power output ideal for your application.



- **POWERFUL** / Up to 55.4 kW & 280 Nm
- **LOW EMISSIONS** / EU Stage V & HVO Certified
- **MODULAR** / Wide range of applications due to a variety of options
- **VERSATILE** / Industrial version



STAGE **V**
certified **V**®

DEUTZ TCD 2.2


— TCD 2.2

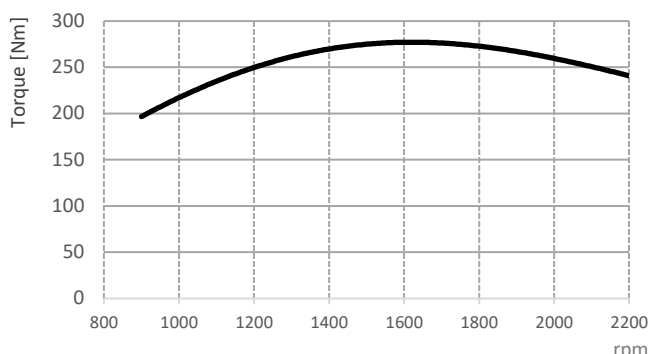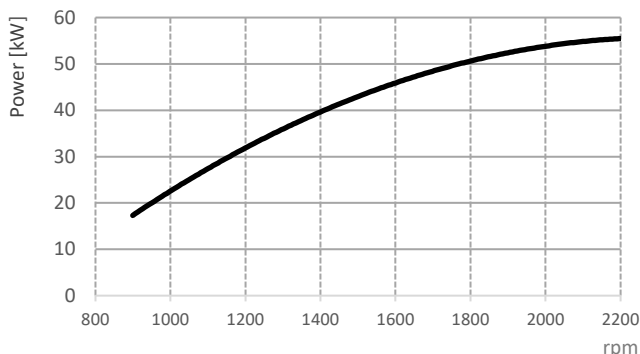

TECHNICAL DATA

ENGINE TYPE	TCD 2.2	
No. of Cylinders	3	
Displacement	l	2.2
Max. Nominal Speed	min ⁻¹	2600
Aspiration	Turbocharger with charge air cooler	
Power Output acc. ISO 14396	kW	55.4
At Speed	min ⁻¹	2600
Max. Torque	Nm	280
At Speed	min ⁻¹	1600
Min. Idling Speed	min ⁻¹	900
Weight (DIN 70020 Part 7A)	kg	316

DIMENSIONS

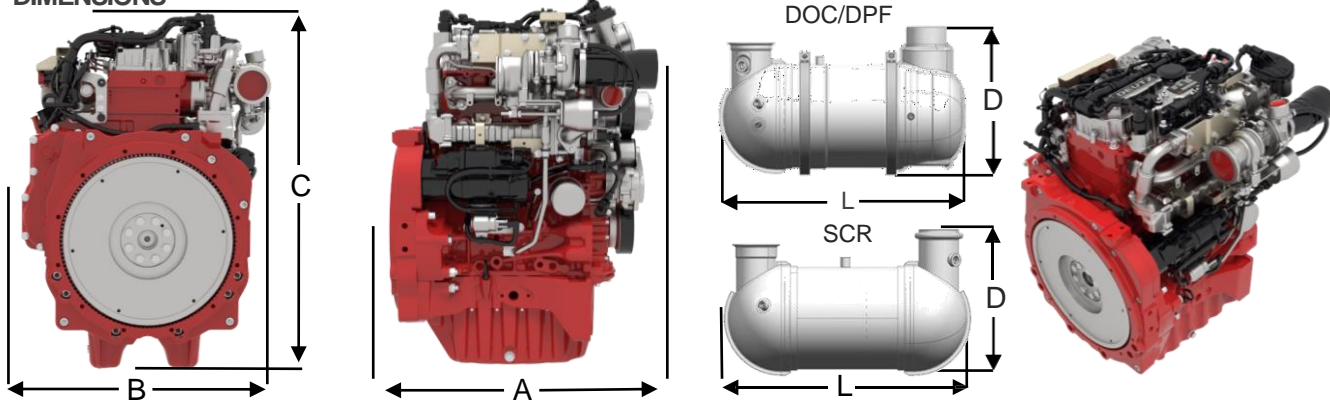

ENGINE TYPE	A	B	C	D	L	D	L	DOC/DPF	SCR
TCD 2.2	mm	587	609	807	199	470	-	-	●

- Standard for US Tier 4
- Standard for EU Stage V



DEUTZ AG
 Ottostraße 1
 51149 Cologne
 Germany
www.deutz.com
www.sdeutz.com