

DEUTZ TCD 4.1 L4

Powerful, efficient and compact.



For mobile machinery

The TCD 4.1 – With 85 up to 115 kW power output ideal for your application.

- **POWERFUL** / Up to 115 kW & 609 Nm
- **LOW EMISSIONS** / EU Stage V, Tier 4f, CN IV & HVO certified
- **MODULAR** / Wide range of applications due to a variety of options
- **VERSATILE** / Agricultural & EDG - Version* (Stage IIIA, Tier 3)
- **POWERPACK** / Modular, compact & ready for installation





STAGE **V**
certified

CHINA
ready **4**

*Emission Downgrade without EAT

DEUTZ TCD 4.1


— TCD 4.1

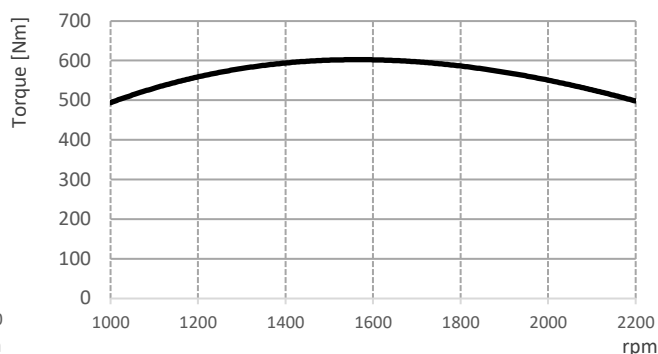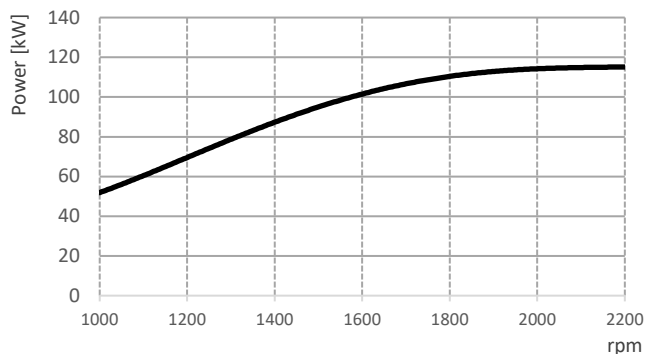

TECHNICAL DATA

ENGINE TYPE	TCD 4.1	
No. of Cylinders		4
Displacement	l	4.038
Max. Nominal Speed	min ⁻¹	2300
Aspiration		Turbocharger with intercooler
Power Output acc. ISO 14396	kW	80 - 115
At Speed	min ⁻¹	2300
Max. Torque	Nm	609
At Speed	min ⁻¹	1600
Min. Idling Speed	min ⁻¹	600
Weight (DIN 70020 Part 7A)	kg	400

DIMENSIONS

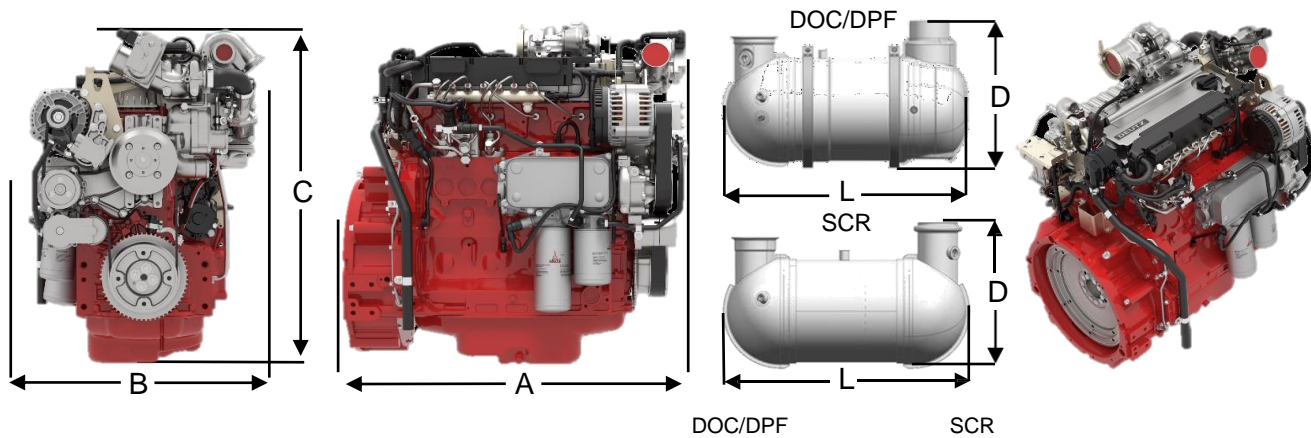

ENGINE TYPE		A	B	C	D	L	D	L	DOC/DPF	SCR
TCD 4.1	mm	852	643	884	246	698	246	659	● ■	● ■

- Standard for US Tier 4
- Standard for EU Stage V

